# Realistic STA-225 (31-2058)

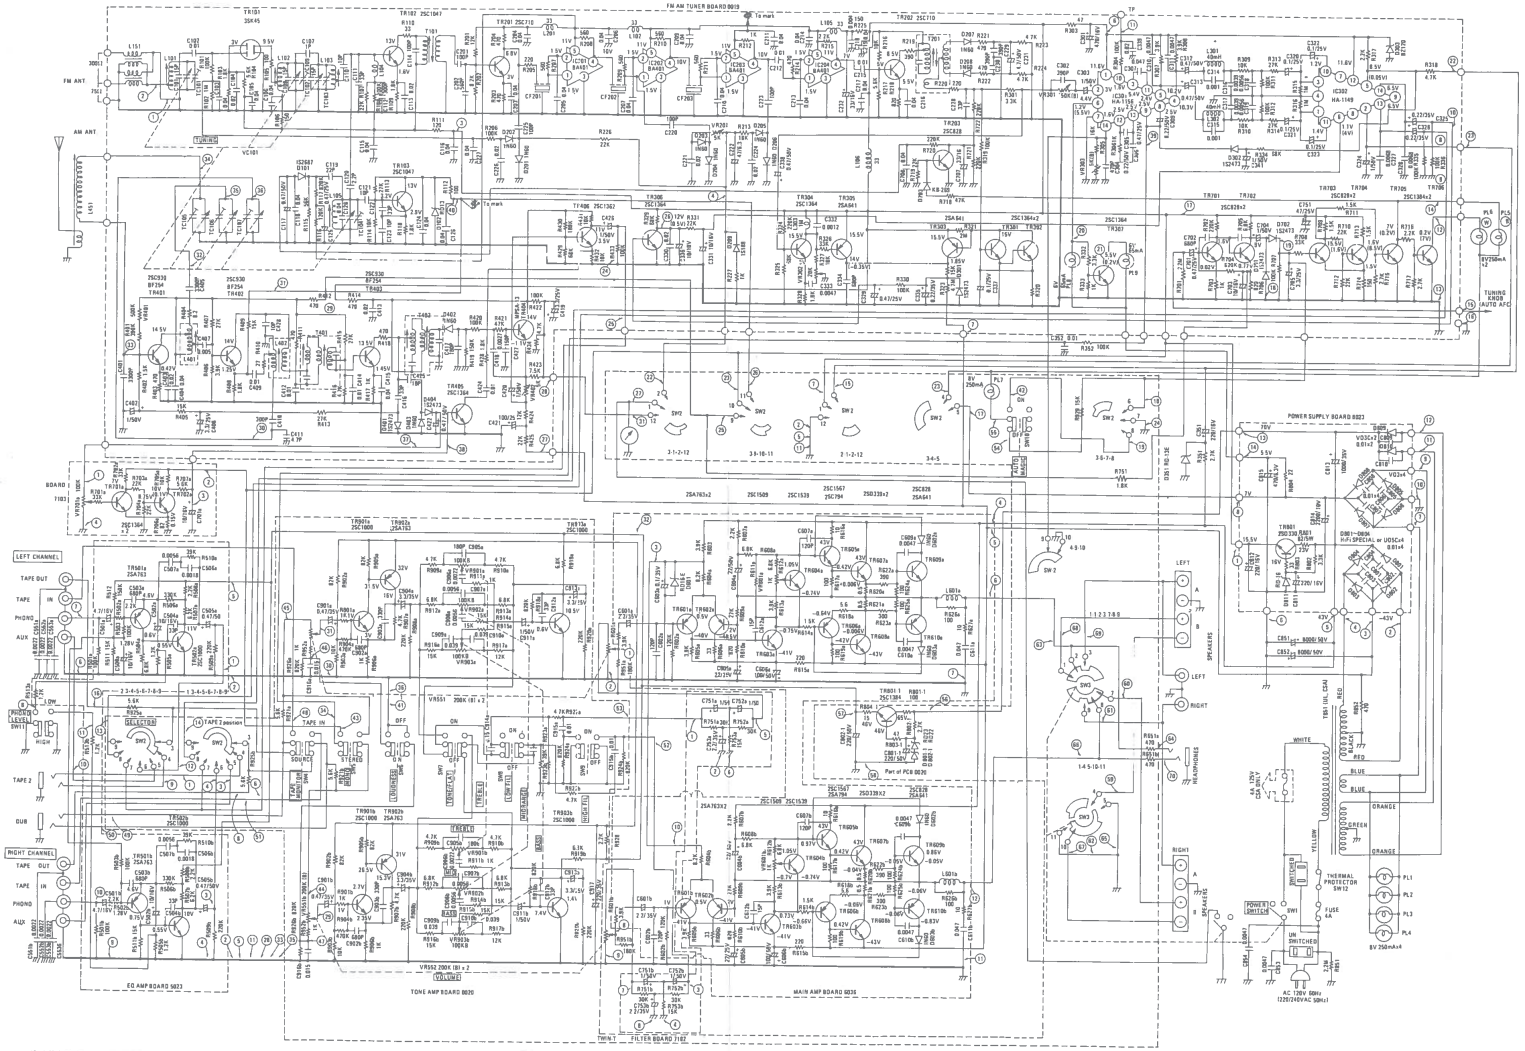













67

68

SWITCHES

SW1 SPEAKERS/POWER (shown in POWER OFF position)
SW2 SELECTOR (shown in TAPE 2 position)
SW3 SPEAKERS/POWER (shown in SPEAKERS OFF position)
SW4 TAPE MON (shown in SOURCE position)
SW5 MODE (shown in STEREO position)
SW6 LOUDNESS (shown in ON position)
SW7 TONE FLAT (shown in OFF position)
SW8 LO FILTER (shown in OFF position)
SW9 HI FILTER (shown in OFF position)
SW10 AUTO M (shown in OFF position)
SW11 PHONO LEVEL (shown in HIGH position)
SW12 THERMAL PROTECTOR (shown in ON position)

Note:
1. Resistance values are indicated in ohms unless otherwise specified (K=1,000, M=1,000,000).
2. Capacitance values are shown in microfarads unless otherwise noted (P=micro-microfarads).
3. DC voltages are referenced to ground under the following conditions. No signal.
   [ ] 1000μV FM Stereo Signal.
4. Numbers shown in circles are pin points.